


# Réservoir AP123, indépendant haute position, déclenchement pneumatique

# Réservoir indépendant

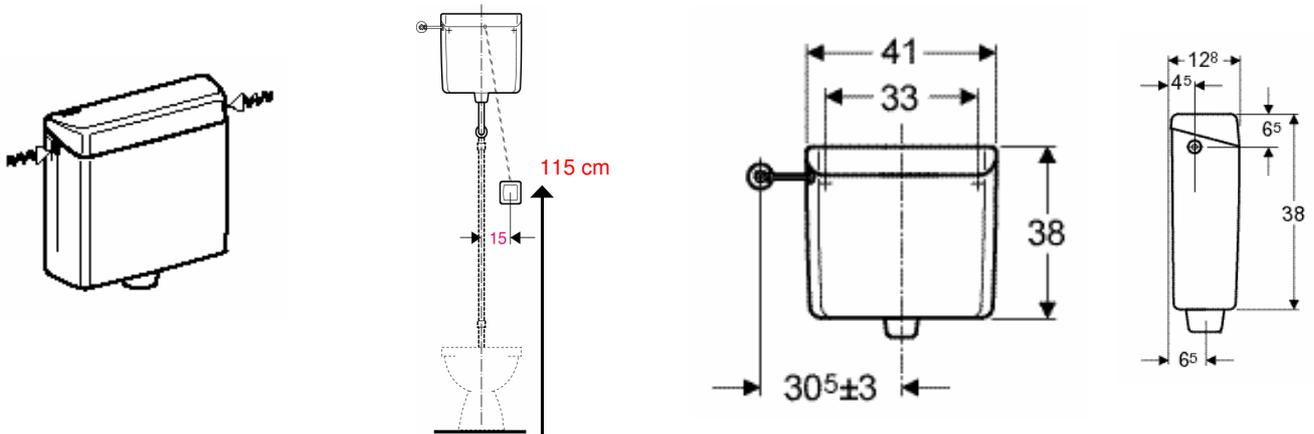

## Description

**Réservoir de chasse haute position, 6/9 L,**  
isolation intérieure contre la condensation robinet  
flotteur Compact silencieux 12/17 **NF**  
**alimentation latérale interchangeable**  
sans coude de chasse, avec fixations et sans ligature  
**Réf : 123.701.11.1**

Les déclenchements pneumatiques sont à  
commander séparément.



Tuyau de chasse modèle haut avec  
colliers


**Réf : 119.504.11.1**



Ligature Ø 32/55 mm pour cuvettes  
normalisées

**Réf : 242.018.00.1**


## Montage



Fixation murale du  
Réservoir réglable  
de 33 à 17 cm

NB : La hauteur de percement est définie en fonction  
de la cuvette du WC et du coude de chasse.

Réglage grande chasse 6/9 litres

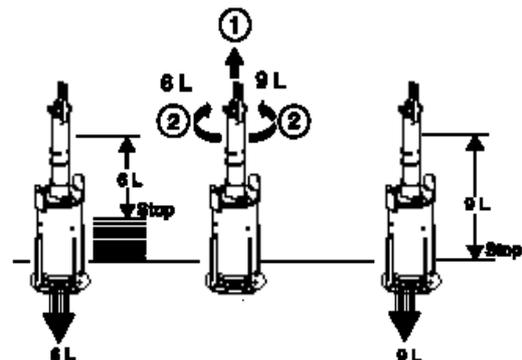

## Déclenchement pneumatique Geberit HyTouch

• Déclenchement pneumatique **apparent double  
touche**, avec tuyau de protection de 90 cm,

capillaire de 2 m  
**Réf : 115.945.xx.1**





• Déclenchement pneumatique **apparent simple  
touche**, avec tuyau de protection de 90 cm,

capillaire de 2 m  
**Réf : 115.940.xx.1**



# High-level cistern AP 123 for pneumatic remote flush actuator

# Cistern for surface mounting

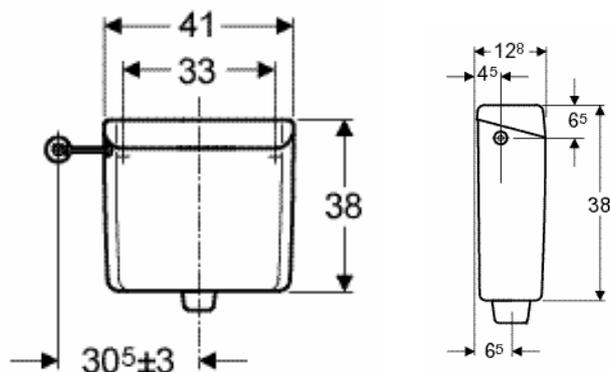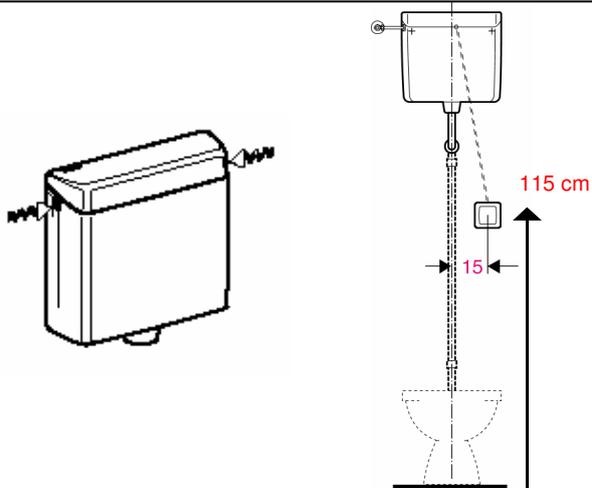


## Description

**High-level cistern, 6/9 L**, fully insulated against condensation, fitting group 1 (noise), with compact float valve 12/17 **NF**, **water connection options left and right**, with lid without actuator, for pneumatic remote flush actuator, with reducer insert, with fastening material, without flush pipe, without push seal

**Réf : 123.701.11.1**

The pneumatic remote flush actuator has to be ordered separately.




Flush pipe high-level with 2 pipe straps  
**Réf : 119.504.11.1**

Push seal, for sealing between flush pipe and fitting, Ø 32/55 mm for normered ceramic

**Réf : 242.018.00.1**


## Installation



Fastening on the wall, reglage from 33 to 17 cm

\*remarque: the level of the boring is determined according to the WC ceramic and the flush pipe.

The flushing volume can be set to 6/9 litres

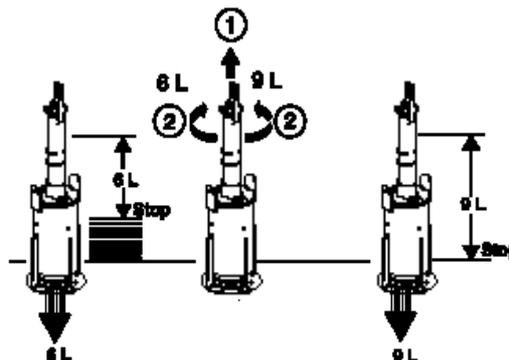

## Pneumatic remote flush actuator Geberit PREGO

• **SM manual actuator dual flush**, with protection pipe 90 cm,



capillary 2 m  
**Réf. 115.945.xx.1**

• **SM manual actuator single flush**, with protection pipe 90 cm,



capillary 2 m  
**Réf. 115.940.xx.1**

**■ GEBERIT**